
Specification-grade well light, wet-location luminaire for uplighting applications.

- · Cast bronze or aluminum frame and grate.
- Seven standard TGIC powder coat finishes and two bronze finishes.
- · Remote transformer required.
- GY 6.35 bi pin porcelain socket.
- IP 68 rated.
- 10 degrees of aiming adjustment.
- · Machined aluminum lamp holder.
- ABS housing: 6"dia. x 10 1/2" OAL.
- · Tempered glass lens.
- · Holds 3 lens accessories.
- · Suitable for drive-over installations.
- 6 feet of 16/2 low voltage cable supplied.
- · Listed for wet location use.
- · Warranty: 25 Years.



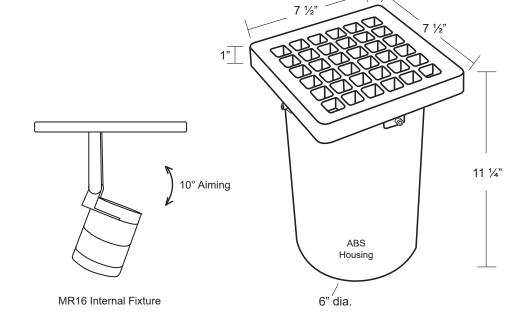

Specifications:

MODEL: IN-4

MATERIAL: Cast Aluminum

Cast Bronze

VOLTAGE: 12V

WATTAGE: 35 Watt

SOCKET: GY-6.35 Bi-pin porcelain socket rated 600V,

250°C 18 ga, Teflon® coated leads.

LAMPING: MR16 Halogen (order separately)

35W Maximum (order separately)

8W LED (order separately)

Ordering Logic:

MODEL METAL FIXTURE REGRESS FINISH

IN - 4 A - Aluminum 1 - 1 3/4" BK - Black BKT - Black Texture
B - Bronze 2 - 3" (standard) BZ - Bronze BZT - Bronze Texture

e 2 - 3" (standard) BZ - Bronze BZT - Bronze Texture
WT - White SL - Silver
BG - Beige DB - Dark Bronze
NT - Natural AC - Aged Copper

ORDERING EXAMPLE: IN - 4 - B - 1 - BK

Excelsior Lighting, Inc.

PROJECT

TYPE