
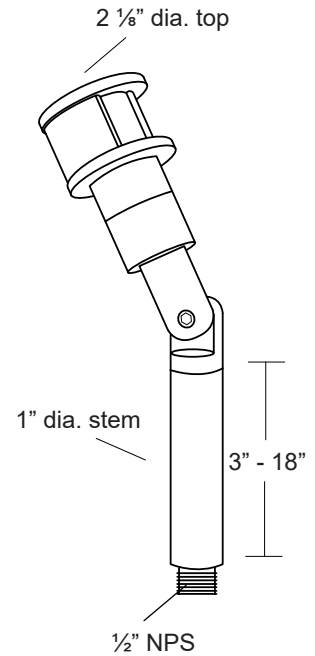


Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Stems lengths of 3" - 18" available. Mount not included.
- Frosted or clear tempered glass lens, glued in.
- 1/2" NPS mount threads (Mount not included.)
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

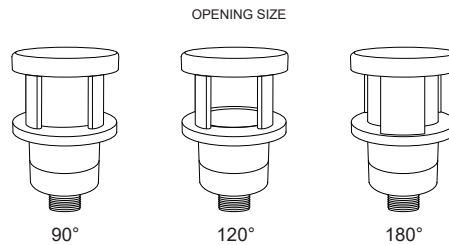

Specifications

| | | | |
|-----------|---|----------|--|
| MODEL: | PL-6 | LAMPING: | T3 Halogen (order separately) 35W Maximum (order separately) 4W LED (order separately) |
| MATERIAL: | Machined Aluminum | | |
| VOLTAGE: | 12V | | |
| WATTAGE: | 35 Watt | | |
| SOCKET: | GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads. | | |

Ordering Logic:

| MODEL | METAL | STEM LENGTH | | LENS STYLE | OPENING SIZE | FINISH | |
|-------|--------------|-------------|----------|-------------|--------------|-------------|----------------------|
| PL- 6 | A - Aluminum | 0 - none | 9 - 9" | F - Frosted | 90 - 90° | BK - Black | BKT - Black Texture |
| | | 3 - 3" | 12 - 12" | C - Clear | 120 - 120° | BZ - Bronze | BZT - Bronze Texture |
| | | 6 - 6" | 18 - 18" | | 180 - 180° | WT - White | SL - Silver |
| | | | | | | BG - Beige | AC - Aged Copper |

ORDERING EXAMPLE: PL - 6 - A - 12 - F - 90 - BZT

Excelsior Lighting, Inc.

PROJECT

TYPE