## Specification-grade wet-location luminaire for sign lighting applications.


- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- · Seven standard TGIC powder coat finishes and clear anodized finish available.
- · Remote transformer required.
- Specify MT-44 model for this product. See spec sheet for product details.
- · Stainless steel hardware.
- Flush lens cap holds 3 lens accessories.
- · Tempered clear glass glued in.
- Available lengths: 12", 18", 24", 30", 36", 42" or 48"

• High-temperature silicone O-ring seal used to seal the cap against the body.


• Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.

· Listed for wet location use.

· Warranty: 10 Years.



45° Angled 90° Regress

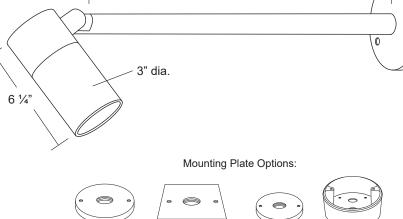

12"- 48"





Specifications

MODEL: SI - 23

MATERIAL: 6061-T6 Aluminum

VOLTAGE: 120V WATTAGE: 50 watt

SOCKET: GU10 Bi-pin porcelain socket rated 600V,

250°C 18 ga, Teflon® coated leads.

LAMPING: MR16 Halogen (orde

4/0 Square

5" square

4/0 Round

5" dia.

MR16 Halogen (order separately) 50W Maximum (order separately) 8W LED (order separately)

3/0 Round

4" dia.

4/0 Box 5" dia.

## Ordering Logic:

MODEL	METAL	CAP	MOUNTING PLATE	STEM LENGTH		FINISH	
SI - 23	A - Aluminum	1 - Flush 2 - Regress 3 - 45 Degree	1 - 4/0 Round 2 - 4/0 Square 3 - 3/0 Round 4 - 4/0 Box	12 - 12" 18 - 18" 24 - 24" 30 - 30"	36 - 36" 42 - 42" 48 - 48"	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver AC - Aged Copper

ORDERING EXAMPLE: SI - 23 - A - 1 - 1 - 24 - BK

## Excelsior Lighting, Inc.

**PROJECT** 

**TYPE**