



Specification-grade landscape lighting, wet-location luminaire for step lighting or path lighting applications.

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- GY 6.35 bi pi socket
- Tempered crystalline spread lens.
- Single gang junction box design.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: Aluminum: 10 Years, Brass: 25 Years.

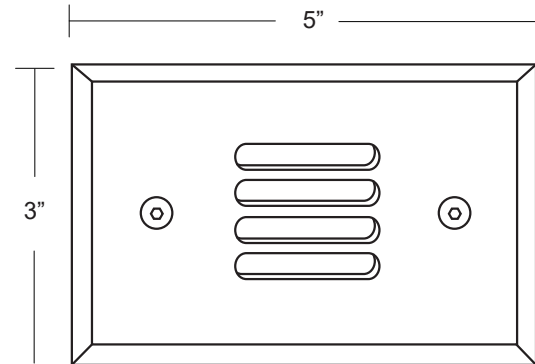

Single-gang J-Box

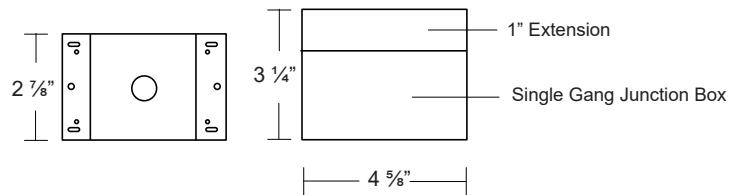

Specifications

|           |   |          |  |
|-----------|---|----------|--|
| MODEL:    | ST-7  | LAMPING: | MR16 Halogen,<br>20W Maximum (order separately)<br>8W LED (order separately) |
| MATERIAL: | Aluminum or Brass   |          |  |
| VOLTAGE:  | 12V   |          |  |
| WATTAGE:  | 20 Watt   |          |  |
| SOCKET:   | GY 6.35 Bi-pin porcelain socket rated 600V,<br>250°C 18 ga, Teflon® coated leads. |          |  |

Ordering Logic:

| MODEL  | METAL                     | FINISH  |   |
|--------|---------------------------|---|---|
| ST - 7 | A - Aluminum<br>B - Brass | BK - Black<br>BZ - Bronze<br>WT - White<br>BG - Beige<br>NT - Natural | BKT - Black Texture<br>BZT - Bronze Texture<br>SL - Silver<br>AC - Aged Copper<br>DB - Dark Brass |

ORDERING EXAMPLE: ST - 7 - A - BK

Excelsior Lighting, Inc.

PROJECT

TYPE