
- Hinged lockable cover and up to five 1/2" and 3/4" knockouts bottom and side entry.
- 300W, 600W, 900W and 1200W sizes.
- · Circuit breaker for each 300W circuit.
- Multi-tap outputs of 11V thru 15V.
- · 6 foot outdoor cord included.
- 120V is standard, 240V or 277V available.
- Stainless steel enclosure, NEMA 3R.
- · For wall mount applications.
- UL and cUL listed for landscape lighting use.
- · Timer and photocell optional.



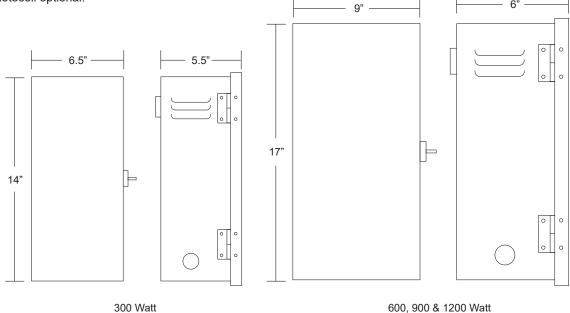

Ordering Logic:

TR - 1 300 - 300 Watts 120 - 120 Volts 0 - None 600 - 600 Watts 240 - 240 Volts T - 24-hour Removable TImer 900 - 900 Watts 277 - 277 Volts P - Built in Photocell 1200 - 1200 Watts TP - 24-hour Removable Timer & Built in Photocell	MODEL	WATTAGE	VOLTAGE	OPTIONS
	TR - 1	600 - 600 Watts 900 - 900 Watts	240 - 240 Volts	T - 24-hour Removable TImer P - Built in Photocell

ORDERING EXAMPLE: TR - 1 - 300 - 120 - T

Excelsior Lighting, Inc.

PROJECT

TYPE