

Model	DL-13L
Lamp:	LED Module: 2W-9W Adjustable
Maximum Wattage:	12W Startup Draw
Input Voltage:	12VAC/DC
Kelvin:	2700K, 3000K, 4000K. CRI = 85
Material:	Machined Aluminum
Hardware:	Stainless Steel
Finishes:	Seven Polyester Powder Coat
Lens:	Tempered Clear Glass
Cap Accessories:	Holds one accessory (optional)
Mounting:	1/2" NPS
Socket:	GY-6.35 Bi Pin Porcelain
Certification:	Wet location
Wiring:	10" 18 ga Teflon Coated
Weight:	.8 lbs.
Warranty:	10 Years
Dimensions:	2 3/8" dia. x 4 3/4" long



Shown in Bronze Powder Coat Finish (BZ)



2W/4W/6W/9W




**METALS:**

6061-T6 Aluminum  
30° Angled Lens Cap



Mounting Plate Options:

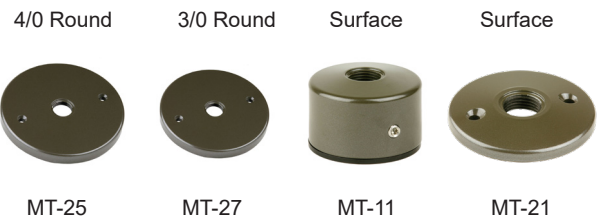

**ORDERING LOGIC:**

Model:	DL - 13L	
Metal:	A - Aluminum	
Mounting plate:	1 - 4/0 Round 2 - 3/0 Round	3 - Surface MT-11 4 - Surface MT-21
Stem Length:	0 - none 3 - 3" 6 - 6"	9 - 9" 12 - 12" 18 - 18"
Finish:	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver AC - Aged Copper



Various mounting options are available for junction boxes and surface mounting. Stem extensions can be added for the desired application.

**ORDERING EXAMPLE:** DL - 13L - A - 1 - 0 - BK

9W MULTI-LEVEL - 2W, 4W, 6W, 9W (165-860 Lumens)



- Equivalent to MR16 20W/35W/50W/75W Halogen (equivalent CBCP)
- Four light levels, 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 3 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Field Replaceable

#	Specifications	Lumens
50	2W - 9W, 2700K, 15°	165-720
51	2W - 9W, 2700K, 30°	165-720
52	2W - 9W, 2700K, 45°	165-720
60	2W - 9W, 2700K, 60°	165-720
53	2W - 9W, 3000K, 15°	190-800
54	2W - 9W, 3000K, 30°	190-800
55	2W - 9W, 3000K, 45°	190-800
61	2W - 9W, 3000K, 60°	190-800
62	2W - 9W, 4000K, 15°	210-860
63	2W - 9W, 4000K, 30°	210-860
64	2W - 9W, 4000K, 45°	210-860
65	2W - 9W, 4000K, 60°	210-860

Wattage	2700k	3000K	4000K
2W	165 lms	190 lms	210 lms
4W	345 lms.	360 lms.	385 lms
6W	515 lms.	530 lms.	590 lms
9W	720 lms.	800 lms.	860 lms

LENSES INCLUDED

15°



45°



30°



60°

