


Machined surface mounted junction box with cover. Utilized for surface mount installation over junction box.

- Machined aluminum construction.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Two 7/8" slip holes. Accepts industry standard conduit connectors.
- Optional 4/0 round junction box covers. Choice of single, dual or single locking cover.
- Fits onto 4/0 standard J-Box.
- Listed for wet location.
- Warranty: 10 Years.

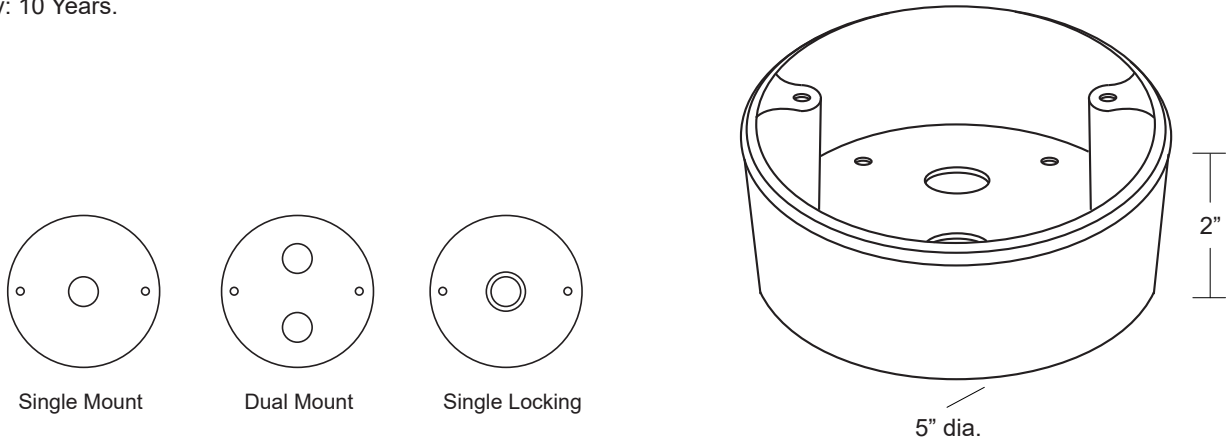

Specifications

MODEL: MT-44
 MATERIAL: Machined Aluminum
 MOUNTING: #10 screw mount holes (4X)

Ordering Logic:

| MODEL | METAL | COVER | STYLE* | INPUT VOLTAGE | FINISH | |
|---------|--------------|--|--|---|---|--|
| MT - 44 | A - Aluminum | 0 - None 1 - Single 2 - Dual 3 - Single Locking | 0 - None 1 - 60W (TR - 6) 2 - 21W (TR - 8) 3 - 60W (TR - 9) | 0 - None 120 - 120 VAC 230 - 230 VAC 277 - 277 VAC | BK - Black BZ - Bronze WT - White BG - Beige | BKT - Black Texture BZT - Bronze Texture SL - Silver AC - Aged Copper |

ORDERING EXAMPLE: MT - 44 - A - 1 - 1* - 120 - BK

*See page 2 for transformer specifications.

Excelsior Lighting, Inc.

PROJECT

TYPE

TR-6

- 60W maximum load
- No minimum load
- 12 VDC output
- 120, 230 or 277 VAC input
- 0.625A 50/60Hz
- Designed for LED lamps
- 10 ft. maximum distance per fixture
- Minimum temperature of -15°C and maximum temperature of 90°C
- Dimmable with regular line dimmers
- 2 3/4" L, 1 3/8" W X 1" H
- Damp location use
- 3-year warranty



TR-8

- 21W maximum load
- No minimum load
- 12 VDC output
- 120-277 VAC input
- 0.22A 63Hz
- Use with ELI 9W or 12W module products
- 10 ft. maximum distance per fixture
- Minimum temperature of -30°C and maximum temperature of 90°C
- Dimmable with regular line dimmers
- 2.76" L, 1.57" W X 1" H
- Damp location use
- 3-year warranty



TR-9

- 60W maximum load
- 3W minimum load
- 12 VDC output
- 120 VAC input
- 50-60Hz
- Use with ELI 9W, 12W, 17W module products
- 10 ft. maximum distance per fixture
- Minimum temperature of -30°C and maximum temperature of 90°C
- Dimmable with regular line dimmers
- 3.00" L, 1.57" W X 1" H
- Damp location use
- 3-year warranty

